

FUZZY CONTROL DESIGN FOR A TWIN ROTOR MULTI-INPUT MULTI-OUTPUT SYSTEM (TRMS)

Mirghani Fateh Elrahman¹, Ahmed Imam², and Awadalla Taifor³

¹Electrical & Electronics Eng. Dept. University of Khartoum

²College of Eng., Karary University, Email: ahmedimam1965@yahoo.com

³Elect. Eng. Dept. Sudan University of Science & Technology, Email: ayha_114@yahoo.com

مُستخلص

تقدم هذه الورقة تصميماً لمتحكم غامض لنظام دوار توأم متعدد المداخل والمخارج. الهدف من ذلك جعل عمود الدوار التوأم يتحرك للوضع المطلوب (الزاوية الأفقية والزاوية الرأسية) بسرعة ودقة عالية. من المتميز جداً إيجاد متحكم لهذا النوع من الأنظمة بسبب الخصائص اللاخطية العالية وتأثير الترابط بين المحورين الرأسي والأفقي. في هذا البحث تم إيجاد النموذج الرياضي الدقيق لكل من الجزء الرأسي والجزء الأفقي للنظام، من أجل الحصول على استجابة مشابهة للنظام الحقيقي. وتم استخدام النماذج كأساس اختبار لإيجاد مجموعة المتحكمات الغامضة. وكان أداء هذه المتحكمات مرضياً من حيث قدرتها على دفع النظام لتتبع الحركة في كلا المحورين. تقدم هذه الورقة أيضاً مقارنة في الأداء بين المتحكمات الغامضة المقترحة والمتحكم التناسبي-التكاملي-التفاضلي التقليدي.

ABSTRACT

This paper presents the designing of fuzzy logic controller for a twin rotor multi-input-multi-output system (TRMS). The control objective is to make the beam of the TRMS move quickly and accurately to the desired positions, i.e., the pitch and the travel angles. Developing controller for this type of system is challenging due to the coupling effects between two axes and also due to its highly nonlinear characteristics. In this investigation accurate dynamic models of the system for both vertical and horizontal movements are developed so as to get very similar responses to that of the real plant. These models are then used as test-beds to develop a set of fuzzy controllers. The performance of the controllers in tracking movements in both vertical and horizontal planes is found to be very satisfactory. A comparative performance study of this fuzzy control approach with respect to a single PID approach is also presented in this study

Keywords: MIMO, TRMS Model, PID Control, Fuzzy Control.

1. INTRODUCTION

Many researchers have recently studied intelligent control in order to solve problems with classical methods of control, and what is remarkable of all is Fuzzy Control using expert's knowledge or experience and Neural Network Control with learning ability [1].

Modern control which proved to be invaluable for providing solutions to well-structured aerospace problems, has not been as successful in process control applications, where the conventional controllers are still used.

However, conventional controllers do not perform optimally for complex problems [2].

One such problem is the TRMS problem discussed in this paper.

Recent work showed that conventional PID tuning turned out to be inadequate for this complex system, resulting in a poor performance. Thus, the objective was to design an intelligent control scheme to overcome the limitations of conventional control. It has been shown that Fuzzy Logic Controller (FLC) could improve the response of TRMS in terms of tracking and transient response [3].

In this paper we discuss the design of a fuzzy logic controller to control the pitch and travel of the TRMS problem. This controller has been designed and simulated in MATLAB.



2 INTELLIGENT CONTROL SYSTEMS

Intelligent control system techniques have been utilized effectively to solve control problems for the past few years. Among them fuzzy systems, neural networks, neuro-fuzzy, and genetic algorithms are the most used methods. In 1974, Mamdani [4] pioneered the investigation of feasibility of using compositional rule of inference that had been proposed by Zadeh [5], for controlling a dynamic system. Later, Mamdani and Assilian [6] developed the first fuzzy logic controller, in a sense; the first fuzzy controller was equivalent to two input fuzzy PD controllers, where error and change of error were used as inputs to the inference engine. Takagi and Sugeno [7] introduced a different linguistic description of the output fuzzy set, and a numerical optimization approach to design fuzzy controller structure. All fuzzy controllers design is based on experience or knowledge. Fuzzy control is characterized by the use of linguistic rules to manipulate and implement human knowledge in control systems so as to handle the uncertainty present in the environment.

In this paper a fuzzy control system has been developed for a TRMS. For such a complicated system the conventional model-based (PID) controller shows poor performance. However, due to its nonlinearity fuzzy logic based control approach looks promising. The applications of fuzzy logic to control these types of systems, with high nonlinearity, have widely been used. Tanaka et al. [8] has implemented a Takagi-Sugeno fuzzy model for stabilization of a 3-DOF RC helicopter. Combined fuzzy and PID control approach for an unmanned helicopter has been reported in [9]. Fuzzy behavior navigation has been implemented on an unmanned helicopter in unknown environment [10]. Shim et al. [11] have performed a comprehensive study of control design for an autonomous helicopter some investigations are reported to have addressed the modeling and control of a TRMS using various model-based and artificial intelligence (AI)-based approaches.

For instance, dynamic modeling and optimal control of a TRMS has been presented in [12]. Performance analysis of 4 types of conjugate gradient algorithms in the nonlinear dynamic modeling of a TRMS using feed-forward neural networks has been reported in [13]. Dynamic modeling of a TRMS has been presented in [14], which has investigated the utilization of neural networks. It is noted that some intelligent control schemes based on fuzzy logic have been applied to TRMS [15, 16]. Those controllers have been developed on the basis of a crude and simple supplied model of the TRMS by feedback. The model has not taken all the acting forces into consideration and therefore does not represent the TRMS accurately. The developed fuzzy controllers, therefore, do not show good performance to various inputs. Most importantly, those controllers cannot be implemented on the real plant. In this investigation the fuzzy controller has been developed on the basis of an accurate dynamic model of the plant and therefore can be implemented on the real TRMS easily.

3 TWIN ROTOR MIMO SYSTEMS

3.1 TRMS Control Structure

The TRMS, shown in Figure 1, is a laboratory set-up designed by Feedback Instruments Limited [16] for control experiments. The TRMS is characterized by its complex and highly nonlinear dynamics. In certain aspects it behaves like a helicopter. However, the TRMS is different from a helicopter in many ways. (Table 1) lists the main differences between a helicopter and a TRMS. The TRMS consists of a beam pivoted on its base in such a way that it can rotate freely both in the horizontal and vertical planes responding to yaw and pitch moments, respectively. At such end of the beam there are two rotors driven by DC motors. The main rotor produces a lifting force allowing the beam to raise vertically (pitch angle), while the tail rotor is used to control the beam turn the left or right (yaw). Both of motors produce aerodynamic force through the blades and also provide the



coupling effect. From the control point of view this exemplifies a high order non-linear system with significant cross-coupling.

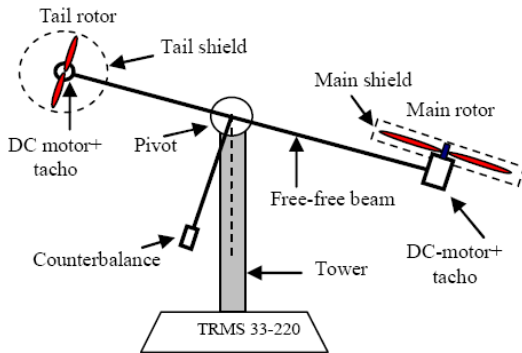


Figure 1: Schematic diagram of the TRMS

Table 1: Main difference between a helicopter and a TRMS

	TRMS	Helicopter
Location of pivot point	Midway between two rotors	Main rotor head
Lift generation of vertical axis	Speed control of main rotor	Collective pitch control
Yaw is controlled by	Tail rotor speed	Pitch angle of tail rotor blades

3.2 TRMS Mathematical Models

A block diagram of the TRMS model is shown in Figure 2, where M_v is the vertical tuning moment, J_v is the moment of inertia with respect to horizontal axis, α_v is the vertical position (pitch angle) of TRMS beam, I_m is the arm of aerodynamic force from main rotor, I_t is the effective arm of aerodynamic force from tail rotor, g is the acceleration of gravity, ω_m is the rotational speed of main rotor, $F_v(\omega_m)$ is the nonlinear function of aerodynamic force from main rotor, k_v is the moment of friction force in horizontal axis, Ω_v is angular velocity (pitch velocity) of TRMS beam, Ω_h is the angular

velocity (azimuth velocity) of TRMS beam α_h is horizontal position (azimuth position) of TRMS beam, M_h is the horizontal tuning torque, J_h is the nonlinear function of moment of inertia with respect to vertical axis, ω_t is the rotational speed of tail rotor, $F_h(\omega_t)$ is the nonlinear function of aerodynamic force from tail rotor, k_h is the moment of friction force in the horizontal axis, J_{tr} is the vertical angular momentum from tail rotor, J_{mr} is the vertical angular momentum from main rotor, S_v is the vertical tuning moment, S_h is the horizontal tuning moment, S_f is the balance factor, U_v and U_h are the DC-motor control inputs, in order to control TRMS in the vertical and horizontal separately.

The main rotor and the tail rotor are decoupled, the mathematical models of main rotor is as follows:

$$\frac{dS_v}{dt} = I_m S_f F_v(\omega_m) - \Omega_v kv + g((A - B)\cos\alpha_v - C\sin 2\alpha_v) - \frac{1}{2} \Omega^2(A + B + C) \sin 2\alpha_v \quad (1)$$

$$\frac{d\alpha_v}{dt} = \Omega_v \quad (2)$$

$$S_v = \frac{S_v + J_{tr}\omega_t}{J_v} \quad (3)$$

$$\frac{dU_{VV}}{dt} = \frac{1}{T_{mr}} (-U_{VV} + U_v) \quad (4)$$

$$\omega_m = P_v(U_{VV}) \quad (5)$$

m_{mr} is the mass of the main DC motor with main propeller, m_m is the mass of main part of the beam, m_{tr} is the mass of tail motor with tail propeller, m_t is the mass of tail part of the beam, m_{cb} is the mass of the counter-weight, m_b is the mass of the counter-weight beam, m_{ms} is the mass of the main shield, m_{ts} is the mass of the tail shield, l_b is the length of counter-weight beam, l_{cb} is the distance between the counter-weight and the joint.

Assume that the main rotor is an independent part:



$$\frac{dS_V}{dt} = I_m S_f F_V(\omega_m) - \Omega_V k_V + g((A - B) \cos\alpha - \sin\alpha_V) \quad (6)$$

$$\Omega_r = 9.1S_V \quad (7)$$

The block diagram of the main rotor is shown in Figure 3.

The mathematical model of tail rotor is as follows:

$$\frac{dS_h}{dt} = I_t S_f F_h(\omega_t) \cos\alpha_r - \Omega_h k_h \quad (8)$$

$$\frac{d\alpha_h}{dt} = \Omega_h \quad (9)$$

$$\Omega_h = \frac{S_h + J_{mr}\omega_m \cos\alpha_V}{J_h} = \frac{S_h + J_{mr}\omega_m \cos\alpha_V}{D \sin^2\alpha_V + E \cos^2\alpha_V + F} \quad (10)$$

$$\frac{dU_{hh}}{dt} = \frac{1}{T_{mr}} (-U_{hh} + U_h) \quad (11)$$

$$\omega_t = P_h(U_{hh}) \quad (12)$$

Assume the tail rotor is an independent system, then:

$$\frac{dS_h}{dt} = I_t S_f F_h(\omega_t) - \Omega_h k_h \quad (13)$$

$$\Omega_h = 90S_h \quad (14)$$

The block diagram of TRMS system is shown in Figure 2.

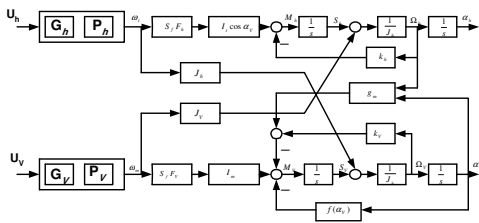


Figure 2: Block diagram of TRMS model

The block diagram of tail and main rotor systems are shown in Figure 3, and Figure 4, respectively.




Figure 3: Block diagram of Horizontal Part of TRMS model

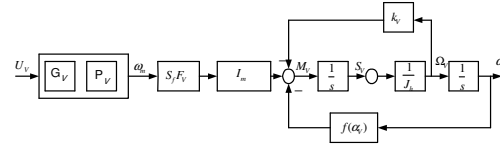


Figure 4: Block diagram of Vertical Part of TRMS model

4 PID CONTROL DESIGN

A PID controller with its basic form shown in equation 15 is proposed for the control design of TRMS; the control theory can be realized for obtaining the proportional, integral and derivative gains of the PID controller. Adjustment may be required for control purposes and to reduce the error from the model. The TRMS has two degrees of freedom, travel and pitch. Results show that conventional PID tuning turned out to be inadequate for this complex system, which resulting in a poor performance.

$$u(t) = K_p(t) + K_i \int e(t)dt + K_d \frac{d}{dt} e(t) \quad (15)$$

5 FUZZY LOGIC

5.1 Fuzzy Fundamental

A conventional fuzzy controller consists of four subsystems, as shown in Figure 6, in which two parts have the duty of transformation; fuzzifier (first transformation), fuzzy rule base, inference engine and defuzzifier (second transformation). The fuzzifier changes the input variables (crisp signals) into fuzzy values. The fuzzy rule base consists of basic data and linguistic rules. The inference engine is the brain of a fuzzy controller which has the ability to simulate the human decision based on fuzzy idea. Finally, the second transformation converts the fuzzy values into the real values.

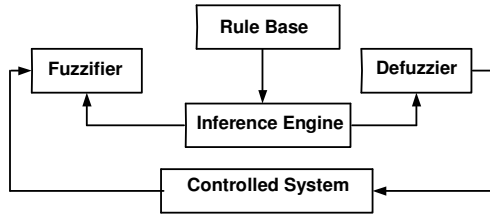


Figure 5: Fuzzy controller and controlled system

5.2 Fuzzy Controller Design

In this paper two fuzzy controllers have been developed, one for horizontal and the other for vertical 1 DOF TRMS. They work simultaneously to give the desired output. One controller controls and keeps track of travel while the other of pitch. Both these controllers are Mamdani Inference [2, 4] and designed in MATLAB. Each controller has two inputs and generates one output for its respective rotor.

The inputs of both fuzzy controllers are beam angle error and the derivative of beam angle error. Figs. 6 to 8 illustrate the membership functions of the inputs and outputs. The most important part of fuzzy controller design is the determination of fuzzy rule base.

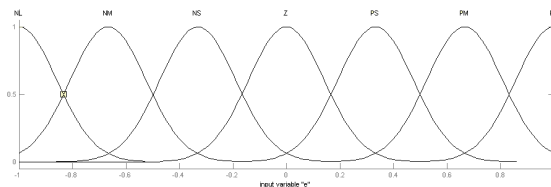


Figure 6: Membership functions of beam angle error

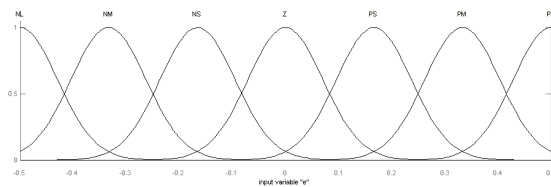


Figure 7: Membership functions of beam angle error change

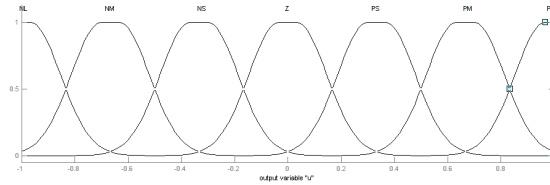


Figure 8: Membership functions of controller output

The fuzzy rule bases for these two controllers have been determined in accordance with the system behavior in both vertical and horizontal planes. The identical rule bases have been used for vertical and horizontal fuzzy controllers. Table 1 lists the rule base of both the fuzzy controllers.

Table 1: Rule Base of Fuzzy Controllers

		CE_v or CE_h							
v o r t i c a l	E		N	N	N	Z	P	P	P
		L	M	S		S	M	L	
	L	N	N	N	N	N	N	N	Z
		L	L	L	L	L	M	S	
	M	N	N	N	N	N	N	Z	P
		L	L	L	L	M	S		S
	S	N	N	N	N	N	Z	P	P
		L	L	L	M	S		S	M
	Z	N	N	N	N	Z	P	P	P
		L	L	M	S		S	M	L
P	N	N	N	Z	P	P	P	P	
	L	M	S		S	M	L	L	
M	N	N	Z	P	P	P	P	P	
	L	S		S	M	L	L	L	
L	N	Z	P	P	P	P	P	P	
	L	S	M	L	L	L	L	L	

6 SIMULATION RESULTS

The TRMS system is decoupled to horizontal part and vertical part. Each part is controlled by a fuzzy controller as shown in Figure 9 and Figure 10. In order to force the TRMS to track the specified trajectory quickly and accurately, the parameters of fuzzy controller g_0 , g_1 , and h , are tuned by using genetic algorithms in the MATLAB. The response of the system with PID controller is shown in Figure 11 and Figure 13.



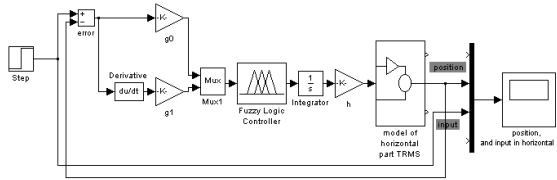


Figure 9: Fuzzy control of the TRMS horizontal part

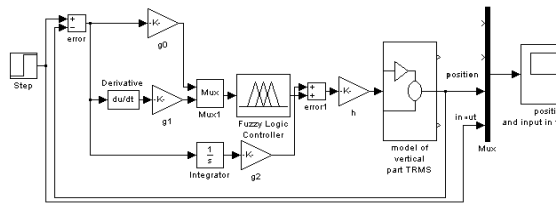


Figure 10: Fuzzy control of the TRMS vertical part

It can be seen that the actual beam angle varies quite a lot from the desired angle. Hence, it can be clearly deduced that the PID controller is not a good solution to the TRMS problem. The response of the system to unit step input with fuzzy control is shown in Figure 12 and Figure 14. Simulations show that the FLC controls the pitch and travel simultaneously such that the system is stable and the response of the system is better than PID controller.

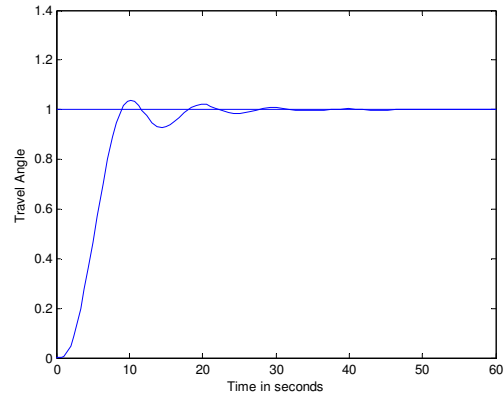


Figure 12: Fuzzy response for travel control of TRMS

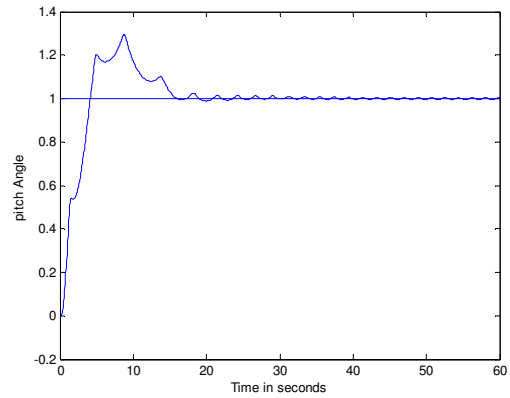


Figure 13: PID response for pitch control of TRMS

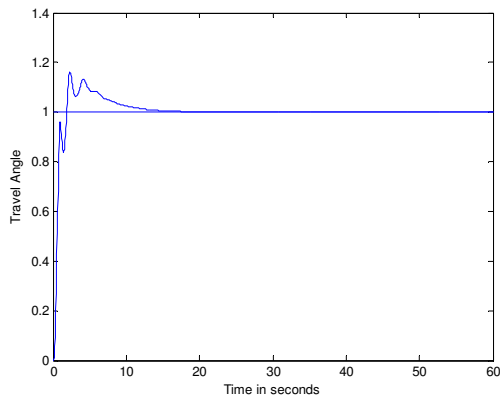


Figure 11: PID response for travel control of TRMS

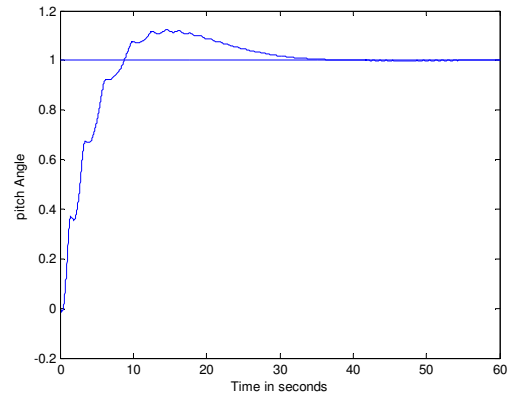


Figure 14: Fuzzy response for pitch control of TRMS

7 CONCLUSION

In this paper, a control problem of the twin rotor multi input multi output system (TRMS) has been studied. The study combines the conventional PID and fuzzy controllers. The fuzzy controller proposed in this paper meets the objective of controlling the TRMS system to achieve stable tracking of inputs, and it is superior in performance compared to conventional controller.

References

1. Junhong Nie, "A Neural Approach to Fuzzy Modeling", Proceeding of the American Control Conference, pp.2139-2142, 1994.
2. Sugeno, M., Induririol oplrearrons of /iq conrrrol. Amsterdam. The Netherlands: Elrevier. 1985.
3. Liu, Ch. Sh., L. R. Chen, B. Z. Li, Sh. K. Chen, Z. S. Zeng, " Improvement of the Twin Rotor MIMO System Tracking and Transient Response Using Fuzzy Control Technology", 2006, pp 1-6.
4. Mamdani, E. H., "Application of fuzzy algorithms for control of simple dynamic plant," Proc, Inst. Elect. Eng. Contr.
5. Zadeh, L. A., "Outline of a new approach to the analysis of complex systems and decision processes, "IEEE Trans. Syst. Man. Cybern. Vol. SMC-3, pp. 28-44, 1973.
6. Mamdani, E.H. and Assilan, "An experiment in linguistic synthesis with a fuzzy logic controller," Int. J. Man-Mach. Vol. 7, pp. 1-13, 1975.
7. Takagi, T. and M. Sugeno, "Fuzzy identification of system and its application to modeling and control," IEEE, Trans. Syst. Man Cybern, Vol. SMC-15, pp. 116-132, 1985.
8. Tanaka, K., H. Ohtake, H. O. Wang, "A Practical Design Approach to Stabilization of a 3DOF RC Helicopter", IEEE Trans. on Control System Technology, Vol. 12, No. 2, March 2004, pp. 315-325.
9. Sanchez, E.N., H.M. Becerra, C.M. Velez, "Combining Fuzzy and PID Control for an Unmanned Helicopter", The American Fuzzy Information Processing Society, 2005, pp. 235-240.
10. Shi, D., M.F. Selekwa, E.G. Collins, "Fuzzy Behavior Navigation for an Unmanned Helicopter in Unknown Environment" IEEE International Conference on System, Man and Cybernetics, October 2005, pp. 3897-3902.
11. Shim, H., T.J. Koo, F. Hoffmann, S. Sastry, "A Comprehensive Study of Control Design for an Autonomous Helicopter" IEEE Conference on Decision & Control, Dec. 1998, pp. 3653-3658.
12. Ahmad, S.M., A.J. Chipperfield, M.O. Tokhi, "Dynamic Modelling and optimal Control of a Twin Rotor MIMO System", IEEE National Aerospace and Electronics Conf., 2000, pp. 391-398.
13. Shaheed, M.H., "Performance analysis of 4 types of conjugate gradient algorithm in the nonlinear dynamic modelling of a TRMS using feedforward neural networks", IEEE International Conf. on Systems, Man and Cybernetics, 2004, pp. 5985-5990.
14. Darus, I.Z. Mat., F.M. Aldebraz, M.O. Tokhi, "Parametric Modelling of a Twin Rotor System Using Genetic Algorithms", International Symposium on Control, Communications and Signal Processing, 2004, pp. 115-118.
15. Juang, J.G., W.K. Liu, C.Y. Tsai, "Intelligent Control Scheme for Twin Rotor MIMO System", IEEE International Conference on Mechatronics, 2005, pp. 102-107.
16. Feedback Corp, "Twin Rotor MIMO System Reference manual."

